



PERINI NAVI




BAGLIETTO 42M



HANSEATIC MARINE 73M

ABT·TRAC®

24"-28" HYDRAULIC BOW & STERN THRUSTERS

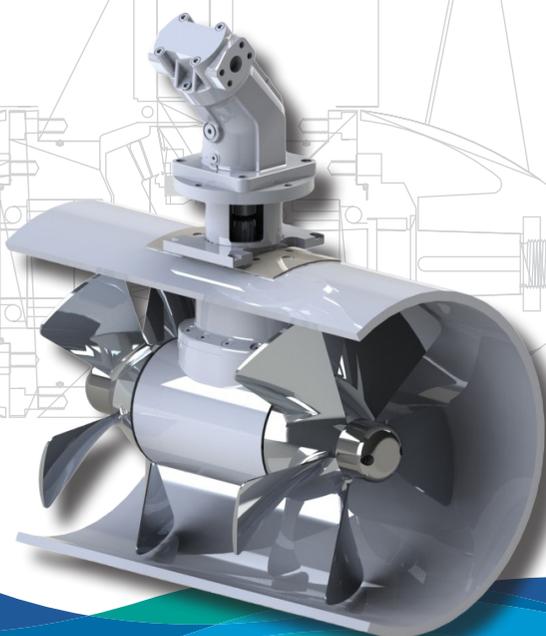

Proportional control. Low profile, Ergonomic design. Spring-to-center or friction lock lever. Power on indicator and audible alarm indicator. Single or dual configuration (bow and stern thruster).

TRAC Hydraulic Thrusters

- TRAC Thrusters deliver **more thrust per horsepower** than any other thruster available
- Twin **counter-rotating propellers** maximize efficiency and eliminate wasted energy

High-Efficiency Power & Control

- High-efficiency piston motors for reliable, heavy-duty performance
- 24-inch thruster up to 150 hp / 28-inch thruster up to 200 hp
- Thruster control is available in **single** or **proportional speed**. Proportional control enables precise maneuvering control

Built for Heavy-Duty Service

- Oversized gears and bearings for long service life
- Propeller hubs shroud the gearbox to protect the prop shaft
- Rotating seal guard provides maximum protection of shaft seals

Ready to Install & Fully Supported

- Systems are fully documented and delivered ready to install
- Factory-tested components
- Expert support from factory technicians and a global service network

For exceptional performance, highest quality, and unmatched support, choose ABT·TRAC

ABT·TRAC®




6108 188th Street N.E., Bldg. A100, Arlington, WA USA
TEL WA: 425-481-2296 CA: 707-586-3155
www.thrusters.com

ABT·TRAC®

24"-28"



HYDRAULIC BOW & STERN THRUSTERS

24" up to 150 HP

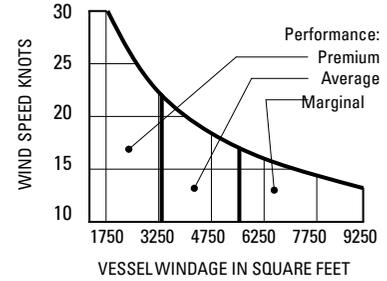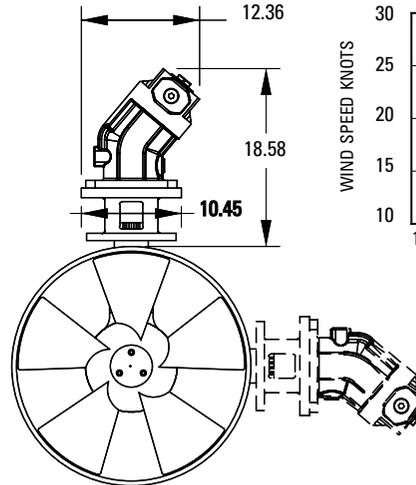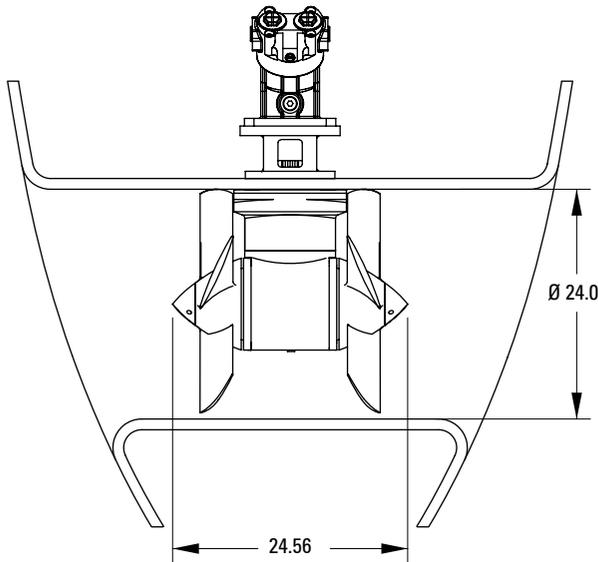

24 INCH	FIBERGLASS	ALUMINUM	STEEL
Tunnel Dimensions	inch (mm)	inch (mm)	inch (mm)
INSIDE DIAMETER	24.00 (609.60)	24.00 (609.60)	24.00 (609.60)
OUTSIDE DIAMETER	- (660.40)	25.00 (635.00)	25.00 (635.00)
Tunnel Weight	lbs/ft (kg/m)	lbs/ft (kg/m)	lbs/ft (kg/m)
	- -	48.40 (72.10)	140.00 (208.30)

28" up to 200 HP

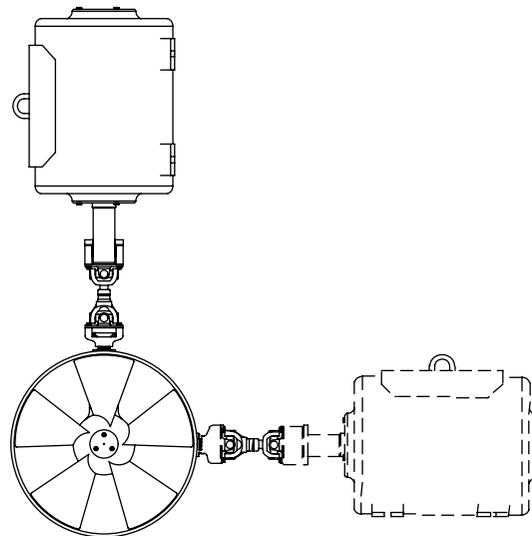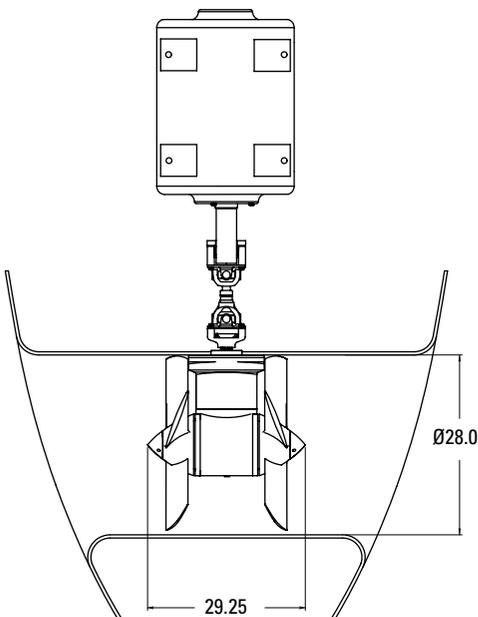

28 INCH	FIBERGLASS	ALUMINUM	STEEL
Tunnel Dimensions	inch (mm)	inch (mm)	inch (mm)
INSIDE DIAMETER	28.00 (711.20)	28.00 (711.20)	28.00 (711.20)
OUTSIDE DIAMETER	- (762.00)	29.00 (736.60)	29.00 (736.60)
Tunnel Weight	lbs/ft (kg/m)	lbs/ft (kg/m)	lbs/ft (kg/m)
	- -	54.30 (80.80)	157.00 (233.60)

(28" Shown With AC Motor Option)

Dimensions shown for reference only and are subject to change. Do not use for installation.